

Aprilia Mirror Mount


Installation instructions

Open Style Kits

These mirror mounts thread into the bars directly with included M6 hardware. Remove the stock bar ends if installed. Pass the stainless screw through the lock washer and then through flat washer and then insert screw through the button and body. Insert into the threaded inserts in the ends of the bars. Tighten with a 5mm hex key and torque the bar end to factory specifications.

Closed Style Kits

Installation - Remove the existing bar ends from the handlebars. The RhinoMoto mirror mount assembly consists of the bar end body, the dress ring, the slider button, and the M6 bolt running through all of the pieces. Install the mirror onto the body slid on as far as it will go and tighten the mirror bracket to keep the mirror in place. Place the lock washer and then the flat washer onto the bolt and slide the bolt through the button and body/mirror assembly. Slide the dress ring onto the body. Note that the recesses in the ring are different sizes. The body goes into the smaller recess for a close fit. While holding the ring onto the body, install the mirror mount assembly until the ring hits the threaded inserts at the ends of the bar. Tighten until snug enough to keep the mirror in the desired position. If you are not satisfied with the position of the mirror adjust it at this time. Once the mirrors are in position you can tighten the screws to factory specifications. **Check the throttle operation to ensure that the mirror mount does not interfere with the throttle motion. Contact RhinoMoto and DO NOT operate motorcycle if the throttle does not operate freely.**

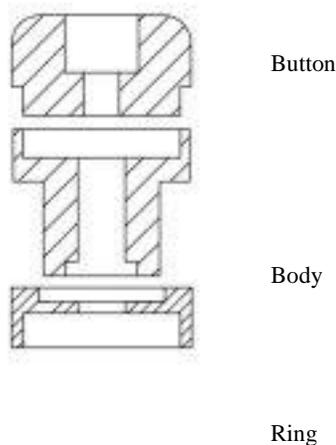

Important –RhinoMoto recommends that these products are to be installed by a qualified mechanic. If you are unsure about your ability to correctly install these sliders, obtain an RMA number from place of purchase and return them for a refund.

Questions? Email us at info@rhinomoto.com